

# UTILITY PATENT APPLICATION TRANSMITTAL

## (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
MUR-V08467

Total Pages in this Submission

### TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

NON-WOVEN FABRIC

and invented by:

Alan John Brasier

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

### Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having nineteen (19) pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
MUR-V08467

Total Pages in this Submission

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal                      Number of Sheets                      two (2)
- b. ☐ Informal                      Number of Sheets                      \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy)                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under  
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement/PTO-1449                      ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class                      ☒ Express Mail (Specify Label No.): EL442468166US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
MUR-V08467

Total Pages in this Submission

**Accompanying Application Parts (Continued)**

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

16. ☐ Additional Enclosures *(please identify below):*

**Fee Calculation and Transmittal**


**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	22	- 20 =	2	x \$18.00	\$36.00
Indep. Claims	3	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input checked="" type="checkbox"/>					\$260.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose) <u>Assignment Recordation Fee</u>					\$40.00
TOTAL FILING FEE					\$1,096.00

☒ Two checks in the amounts of \$760 and \$40 to cover the above fees are enclosed.

☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 18-0350 as described below. A duplicate copy of this sheet is enclosed.

- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

Dated: September 16, 1999

Allan Ratner, Reg. No. 19,717  
Ratner & Presita  
Suite 301  
One Westlakes, Berwyn  
P.O. Box 980  
Valley Forge, PA 19482-0980  
(610) 407-0700

cc:

**CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)**Applicant(s): **Alan John Brasier**

Docket No.

**MUR-V08467**Serial No.  
(to be assigned)Filing Date  
(herewith)

Examiner

Group Art Unit

Invention: **NON-WOVEN FABRIC**Jc542 U.S. PTO  
09/397616  
09/16/99I hereby certify that this Utility Patent Application w/Assignment, IDS and related enclosures  
(Identify type of correspondence)is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under  
37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on  
September 16, 1999  
(Date)Kathleen Libby

(Typed or Printed Name of Person Mailing Correspondence)

Kathleen Libby  
(Signature of Person Mailing Correspondence)EL442468166US

("Express Mail" Mailing Label Number)

**Note: Each paper must have its own certificate of mailing.**

1     **NON-WOVEN FABRIC**

2

3     This invention relates to a non-woven fabric and its  
4     uses, and relates more particularly but not exclusively  
5     to the use of a needlefelt for the covering of tennis  
6     balls, and to tennis balls so covered.

7

8     For the meaning of textile-related terms as used in  
9     this specification, attention is directed to the  
10    definitions in the reference book "Textile Terms And  
11    Definitions" (Eighth Edition) published in 1986 by The  
12    Textile Institute (of the United Kingdom). References  
13    in this specification to "tennis ball(s)" are to be  
14    taken as comprising references to analogous balls, i.e.  
15    to balls for games other than tennis but which are  
16    resilient hollow balls or otherwise structurally and  
17    functionally analogous to tennis balls, whether or not  
18    such analogous balls are interchangeable with tennis  
19    balls, and to felt-covered balls in general.

20

21    Traditionally, tennis balls have been covered with a  
22    felted textile material having a surface predominantly  
23    composed of wool fibres and based on a woven scrim or  
24    substrate. During the process of finishing the felted  
25    textile material, the scale structure of the wool

1 fibres is utilised to produce the characteristic felted  
2 surface appearance of the ball.

3

4 Nowadays woven felts for covering tennis balls are  
5 produced with a surface that is commonly composed of a  
6 mixture of wool and polyamide fibres. Usually these  
7 fibres are mixed at a ratio of about 60% wool & 40%  
8 nylon, but this ratio may vary in dependence on the  
9 wear characteristic required of the ball. It is also  
10 desirable that the back side of the felt (which is the  
11 side of the felt intended to be adhered to the core of  
12 the ball) be made of a material which provides a good  
13 adhesion when it is glued onto the hollow rubber sphere  
14 forming the core of the ball. Usually such backing is  
15 made of cotton.

16

17 Following the introduction of needlefelting machines,  
18 attempts have been made to produce and utilise  
19 needlefelts (felts composed of non-woven fabrics and  
20 produced by needlefelting machines) for covering tennis  
21 balls. Needlefelting techniques can be used to produce  
22 a non-woven fabric for covering tennis balls in  
23 accordance with the following method :- an appropriate  
24 blend of fibres, either dyed or undyed, is carded and  
25 cross-lapped to form a substantially horizontal fibre  
26 batt (a non-woven web). The fibres of the batt are  
27 provided in a generally planar configuration and are  
28 superimposed according to successive horizontal  
29 patterns. This batt is then passed through a known  
30 form of needlefelting machine. Such a needlefelting  
31 machine has at least one reciprocable panel (or  
32 "needleboard") comprising a cluster or array of barbed  
33 needles arranged mutually parallel, pointing in the  
34 same direction, and secured on a common substrate or  
35 mounting. The needlefelting machine may have two  
36 independently operable needleboards arranged on

1 mutually opposite sides of the fibre web and disposed  
2 in succession along the normally horizontal path  
3 followed by the batt as it passes through the machine  
4 during needlefelting operation. As the batt is passed  
5 horizontally through the needlefelting machine, the or  
6 each needleboard is vertically reciprocated to cause  
7 its cluster of barbed needles repeatedly to punch into  
8 and through the web, and then back out of the fabric  
9 web (on the same side as entry). The vertical passage  
10 of the barbed needles back and forth through the batt  
11 provokes a vertical entanglement of the fibres in the  
12 batt as the barbs of the needles carry some portion of  
13 the fibres along their pathways through the batt.

14  
15 Needlefelting machines have a higher productivity of  
16 fabric than looms producing woven fabric, and  
17 needlefelting machines will produce a felted fabric  
18 without the need to incorporate costly wool fibres and  
19 without the need to apply expensive finishing processes  
20 to the fabric. Consequently ball-covering needlefelts  
21 are cheaper than ball-covering woven fabrics. However,  
22 needlefelts lack the flexibility that is characteristic  
23 of woven fabrics, and consequently when balls are  
24 covered with shaped blanks of needlefelt, the seams of  
25 the covering are liable to be defective due to  
26 puckering of the blanks. Also, the so-covered balls  
27 tend to feel hard when hit, exhibit poor flight  
28 characteristics, and have poor wear resistance. These  
29 adverse properties arise from the smoother surface and  
30 greater consolidation of non-woven felts in comparison  
31 to woven felts.

32  
33 Attempts have been made to overcome the above-discussed  
34 defects of conventional needlefelted ball coverings,  
35 for example by modifying needling density (needle  
36 penetrations per unit area of web), or by incorporating

1 a felt-backing scrim of greater flexibility; such  
2 attempts have not been successful. In a recent attempt  
3 to increase fibre entanglement in the finished felt, a  
4 percentage of wool fibre has been incorporated into the  
5 fibre blend prior to needlefelting, and the  
6 needlefelted fabric has been milled in a manner similar  
7 to the milling of woven felts. However, the non-woven  
8 fabrics that resulted from these procedures still  
9 failed to replicate the desirable characteristics of  
10 good-quality woven ball-covering felts.

11  
12 A comparative study of the cross-sectional  
13 characteristics or microstructure of traditionally  
14 woven tennis ball felts and non-woven felts produced by  
15 needlefelting machines showed that fibres in woven felt  
16 are predominantly anchored in the base woven structure  
17 but are distributed in generally random directions  
18 throughout the surface pad of the felt, thus producing  
19 a high level of fibre intersections for a given density  
20 of felt. Also, the fibre density declines from the  
21 scrim (basecloth or backing) of the felt towards the  
22 opposite surface (normally the outer surface). The  
23 base structure retains a woven characteristic, and has  
24 a significantly greater fibre density than the outer  
25 surface. A typical woven ball-covering felt has a  
26 fibre density of 300 milligrams per millilitre at its  
27 base, diminishing to about 150 milligrams per  
28 millilitre towards the opposite (outer) surface. These  
29 characteristics, particularly the degree of fibre  
30 entanglement per unit density, are critical to the  
31 behaviour of the felt both during the ball-covering  
32 process and on the ball in play (i.e. in use).  
33 Conventional needlefelting techniques redistribute a  
34 proportion of the fibres laid predominantly  
35 horizontally during the cross-lapping process into a  
36 predominantly vertical configuration, the fibres



1 needed to verticality intersecting those not impacted  
2 by the needles at or close to right angles. Also, the  
3 fibre density (excluding any scrim material) can be  
4 seen to be nearly consistent throughout the thickness  
5 of the felt. From these observations it becomes  
6 apparent that the ratio of fibre intersections or  
7 degree of fibre entanglement is much lower in  
8 needlefelt than in woven felt for a given density of  
9 material. Thus, in order to achieve acceptable  
10 abrasion resistance and wear resistance characteristics  
11 in a ball that is covered in a needlefelt by means of  
12 giving the needlefelt a level of fibre entanglement  
13 that is comparable to that in a woven ball-covering  
14 felt, it is necessary to apply a high needling density  
15 (number of needle penetrations per unit of web area).  
16 High needling density renders the resultant needlefelt  
17 significantly less flexible than woven ball-covering  
18 felt, thus making the ball-covering process more  
19 difficult and more prone to defects. Balls covered  
20 with highly needled felt feel harder when hit than  
21 balls covered in woven felt, and generally fly faster  
22 due to the needlefelt surface being smoother and more  
23 consolidated than the surface of a woven felt. Such  
24 deficiencies may not be particularly significant for  
25 recreational use of tennis balls, but the defects in  
26 ball characteristics renders such balls unacceptable  
27 for use in professional tennis and in championship-  
28 level tennis matches.

29  
30 From the facts detailed above, it can be concluded that  
31 felted ball coverings produced using conventional  
32 needlefelting techniques cannot replicate the density  
33 and wear characteristics equivalent to woven ball-  
34 covering felts and simultaneously provide the  
35 performance characteristics required of good-quality  
36 tennis balls (e.g tennis balls of championship

1 standard) .

2

3 It has now been discovered that a needlefelt produced  
4 by a needlefelting machine having a needleboard which  
5 is curved or otherwise shaped to ensure fibre  
6 entanglement in a range of angles (transverse to the  
7 plane of the felt web) exhibits surprisingly good  
8 characteristics of both wear and covering capabilities,  
9 and is particularly suitable for tennis ball coverings.

10

11 Such needlefelting machines are available from the  
12 Austrian Company Textiles Maschinenfabrik Dr E. Ferher  
13 AG and are known in the Trade as machines incorporating  
14 "Ferhrer H1 Technology" (see published British Patent  
15 Applications GB2306519-A, GB2310221-A, GB2312220-A,  
16 GB2315281-A, & GB2316957-A). However, these novel  
17 needle felting machines and techniques have never  
18 previously been proposed for production of a non-woven  
19 fabric having characteristics suitable to be used as a  
20 tennis ball covering.

21

22 According to a first aspect of the present invention  
23 there is provided a method of forming a felt covering  
24 for a ball, characterised by the steps of forming a  
25 needlefelt comprising an entanglement of fibres  
26 produced by needling a fibre batt in a range of angles  
27 including a plurality of angles which are non-  
28 perpendicular to the plane of the batt, and cutting or  
29 otherwise shaping the needlefelt to form a blank  
30 adapted at least partially to cover a ball.

31

32 The batt is preferably curved during needling, and  
33 where the batt is moved longitudinally as a step in the  
34 needling process, the batt is preferably curved in a  
35 longitudinal direction while being needled.

36

1 According to second aspect of the present invention  
2 there is provided a needlefelt for a ball covering,  
3 said needlefelt being characterised in that it  
4 comprises an entanglement of fibres formed by the  
5 needlefelting of a fibre batt passed through a  
6 needlefelting machine having at least one needleboard  
7 providing barbed needles to penetrate said web in a  
8 range of angles including a plurality of angles which  
9 are non-perpendicular with respect to the plane of the  
10 batt, and in that said needlefelt is cut or otherwise  
11 shaped to form a blank adapted at least partially to  
12 cover a ball.

13  
14 During needling of the batt in the needlefelting  
15 machine the batt is preferably curved in the direction  
16 of its travel through the needlefelting machine, and  
17 the needleboard is preferably correspondingly curved.  
18 The needlefelting machine preferably comprises two  
19 needleboards at respective locations which are mutually  
20 displaced along the direction of travel of the batt  
21 through the needlefelting machine and which are  
22 preferably disposed to needle the batt from mutually  
23 opposite sides of the batt. Where the needlefelt  
24 incorporates a scrim, the first of said two  
25 needleboards is preferably disposed to needle the  
26 layered combination of batt and scrim from the side  
27 opposite to the scrim.

28  
29 Prior to needled, the batt may be subjected to a  
30 preliminary consolidation and fibre entanglement in a  
31 pre-needling machine, the batt preferably being curved  
32 in its direction of travel through the pre-needling  
33 machine.

34  
35 The ball is preferably a resilient hollow ball, and may  
36 be a tennis ball.

1 According to a third aspect of the present invention  
2 there is provided a felt-covered ball, characterised in  
3 that the ball-covering felt is a needlefelt comprising  
4 an entanglement of fibres formed by the needlefelting  
5 of a fibre batt passed through a needlefelting machine  
6 having at least one needleboard providing barbed  
7 needles to penetrate said web in a range of angles  
8 including a plurality of angles which are non-  
9 perpendicular with respect to the plane of the batt.

10  
11 Said felt-covered ball preferably comprises a hollow  
12 resilient core to which the needlefelt covering is  
13 adhered, and said ball may be a tennis ball.

14  
15 According to a fourth aspect of the present invention  
16 there is provided a felt-covered ball, characterised in  
17 that the ball is covered with needlefelt produced by  
18 the method according to the first aspect of the present  
19 invention.

20  
21 According to fifth aspect of the present invention  
22 there is provided a felt-covered ball, characterised in  
23 that the ball is covered with needlefelt according to  
24 the second aspect of the present invention.

25  
26 The ball according to the fourth or fifth aspects of  
27 the present invention may be a tennis ball.

28  
29 Embodiments of the invention will now be described by  
30 way of example with reference to the accompanying  
31 drawings wherein :

32  
33 Fig. 1 is a schematic representation of the needle  
34 paths followed by the needles in conventional  
35 needling in a conventional needlefelt;  
36

Fig. 2 is a schematic representation of the needle paths following by the needle in the needlefelt applied to ball covering in accordance with the present invention; and

Fig. 3 is a schematic representation of a needlefelting machine and process for the production of a ball-covering needlefelt in accordance with the present invention.

Fig. 4 is a schematic representation of fibre entanglement in a conventional needlefelt.

Fig. 5 is a schematic representation of fibre entanglement in the needlefelt applied to ball covering in accordance with the present invention.

Referring first to Fig. 4, this is a schematic cross-section through a conventional needlefelt 9, the cross-section being taken in a vertical longitudinal plane. The needlefelt 9 is formed from a web or batt of non-woven fibres, the batt being of indefinite length from left to right as viewed in Fig. 4 (which depicts a short piece of the batt). The vertical lines shown in Fig. 1 (19) depict the needle paths followed by the needles during the conventional needlefelting process which provoke change of orientation of some of the fibres from initially horizontal alignments to vertical alignment (i.e. at right angles to the plane of the batt). It is to be particularly noted that the fibres in this conventional needlefelt 9 are entangled to a minimal extent.

Referring now to Fig. 2, this schematically depicts the needlepaths 28 of needles used to produce a needlefelt 18 as shown in Fig. 4 with highly entangled fibres.

Such needlepaths are produced by the needlefelting machinery about to be described with reference to Fig. 3. To produce the needlefelt 18 of Fig. 5, an appropriate blend of fibres, either dyed or undyed, is carded and cross-lapped to form a fibre batt 10 (Fig. 3) as a starting material for the needlefelting processes to follow. The batt 10 weighs between 350 grams per square metre and 850 grams per square metre depending on the weight required for the finished product. The fibres of the batt 10 could be composed of a mixture of wool and polyamide fibres, but other fibres could be incorporated or substituted as necessary or desirable.

The batt 10 is then passed through a pre-needling needlefelting machine 11 wherein the batt is curved while being needled such that the needles penetrate the batt in a range of angles, including a plurality of angles which are non-perpendicular to the surface of the batt. The machine 11 has a correspondingly curved needleboard 12 containing about 5000 needles disposed in a down-punch configuration (i.e. the needles are driven into the batt from above). The pre-needling machine 11 is advantageously of the type described in GB2315281-A, and as sold under the Trade Name "Fehrer H1 Technology" by the Fehrer Company of Austria.

The shape and size of the needles selected for use in the pre-needling machine 11 would depend on the results required. These needles are preferably three-inch, 40-gauge needles with regular barbs. Draft (reduction of linear density by drawing or longitudinal stretching), needle penetration depth and penetration density (number of needle penetrations per unit area of batt) are varied according to product requirements. For a tennis ball covering of good quality it is preferred to

1 use a draft of about 15% and to provide a penetration  
2 depth of about 10 millimetres at about 80 needle  
3 penetrations per square centimetre of batt.

4  
5 The pre-needled batt of fibres 13 as delivered from the  
6 pre-needling machine 11, together with an appropriate  
7 scrim (backing fabric) 14, are passed through a finish  
8 needling machine 15 with the width and length of the  
9 batt 13 being generally horizontal. The scrim 14 is  
10 preferably a polyester or polyamide warp knit with a  
11 weight of about 75 grammes per square metre. The  
12 machine 15 has two needleboards 16 & 17, each  
13 needleboard of the needleboards 16 & 17 containing  
14 approximately 5000 needles, the first needleboard 16  
15 being disposed in up-punch configuration and the second  
16 needleboard 17 being disposed in down-punch  
17 configuration. ("Up-punch" refers to the needles being  
18 driven into the batt from below, and "down-punch"  
19 refers to the needles being driven into the batt from  
20 above). Each of the needleboards 16 & 17 is curved in  
21 a longitudinal plane, i.e. a plane which extends in the  
22 direction of batt travel through the needling machine  
23 15 and which is also vertical to the lateral extent of  
24 the generally horizontal batt 13 (e.g. as described in  
25 GB2306519-A & GB2312220-A), the batt 13 (and scrim 14)  
26 being correspondingly curved during needling by the  
27 respective needleboards 16 & 17. Such curvature  
28 results in the batt 13 and scrim 14 being needled in a  
29 range of angles, including a plurality of angles which  
30 are non-vertical to the surface of the batt, thereby to  
31 produce a needlefelt in which the fibres are highly  
32 entangled (as depicted in Fig. 2).

33  
34 At the upstream or input end of the needling machine  
35 15, the scrim 14 is in-fed to lie along and above the  
36 fibre batt 13. Thus the first (up-punch) needleboard

1 16 of the finish needling machine 15 will needle fibres  
2 from the fibre batt 13 upwardly through the scrim 14  
3 while the second (down-punch) needleboard 17 will  
4 needle fibres back down through the scrim 14 into the  
5 fibre batt 13. By selectively altering the punch  
6 density and the depth of needle penetration by the  
7 second needleboard 17 it is possible to controllably  
8 alter the fibre density through the thickness of the  
9 finished needlefelt 18.

10

11 The needles selected for use in the finish needling  
12 machine 15 would depend on the results required. These  
13 needles are preferably 3-inch, 40-gauge needles with  
14 regular barbs. Draft, needle penetration depth and  
15 penetration density can be varied according to product  
16 requirements; by suitably varying these parameters it  
17 is possible to alter the flexing characteristics,  
18 surface appearance and wear characteristics of the  
19 product. For tennis ball coverings of a good quality  
20 it has been found that a penetration of 14 millimetres  
21 at down-punch and a penetration of 10 millimetres at  
22 up-punch with a punch density of 80 penetrations per  
23 square centimetre without drafting (i.e. without  
24 reducing linear density by drawing or longitudinal  
25 stretching) can produce good results with regard to  
26 meeting the performance characteristics required for  
27 championship tennis. Reference to Fig. 2 will show the  
28 reason for this improvement in properties, namely the  
29 entanglement of fibres at various different angles due  
30 to the several different needle penetration angles  
31 arising from the imposition of longitudinal curvature  
32 on the batt as it is needled (see Fig. 6 of GB2310221-  
33 A, & Fig. 1 of GB2312220-A).

34

35 The needlefelt tennis ball covering material so  
36 produced may optionally be subjected to further



processing. For example, a woollen milling process can, if required, be used to enhance the felt characteristics, particularly in respect of appearance and some aspects of wear. Additionally, the needlefelt may be dyed at this stage and dried. A shearing or cropping process may also be deemed appropriate.

The needling process carried out on longitudinally curved batt produces fibre entanglement by moving fibres through the thickness of the felt at angles other than the conventional 90 degrees to the felt surface thus giving increased fibre to fibre contact at lower punching densities. This allows the manufacture of a needlefelt having high levels of fibre entanglement but without excessive consolidation. By using such needlefelting technology and controlling the depth of needle penetration it is possible to vary and control the density of the felt through its thickness.

To make a tennis ball covered by the needlefelt obtained by the process described with reference to Fig. 3, suitably shaped blanks are cut from the needlefelt, and then glued on to a ball core constituted by a resilient hollow rubber sphere of appropriate dimensions. Such blanks may be the "figure-eight" blanks traditionally used in pairs for forming the covering of a tennis ball. The scrim provides a smooth backing surface enabling good adhesion between the needlefelt and the hollow rubber core of the ball.

The preferred needling machinery for producing ball-covering felts is schematically depicted in Fig. 3, but modified arrangements may be utilised. For example, two separate needling machines (not shown) may be utilised in tandem (with suitable synchronisation of

© 2006 The Authors  
Journal compilation © 2006 Blackwell Publishing Ltd

1     **CLAIMS :**

2

3     1.    A method of forming a felt covering for a ball,  
4           characterised by the steps of forming a needlefelt  
5           comprising an entanglement of fibres produced by  
6           needling a fibre batt in a range of angles  
7           including a plurality of angles which are non-  
8           perpendicular to the surface of the batt, and  
9           cutting or otherwise shaping the needlefelt to  
10          form a blank adapted at least partially to cover a  
11          ball.

12

13    2.    A method as claimed in claim 1, characterised in  
14          that the batt is curved during needling.

15

16    3.    A method as claimed in claim 2 wherein the batt is  
17          moved longitudinally as a step in the needling  
18          process, characterised in that the batt is curved  
19          in a longitudinal direction while being needled.

20

21    4.    A needle felt for a ball covering, said needlefelt  
22          being characterised in that it comprises an  
23          entanglement of fibres formed by the needlefelting  
24          of a fibre batt passed through a needlefelting  
25          machine having at least one needleboard providing  
26          barbed needles to penetrate said batt in a range  
27          of angles including a plurality of angles which  
28          are non-perpendicular with respect to the surface  
29          of the batt, and in that said needlefelt is cut or  
30          otherwise shaped to form a blank adapted at least  
31          partially to cover a ball.

32

33    5.    A needlefelt as claimed in claim 4, characterised  
34          in that during needling of the batt in the  
35          needlefelting machine the batt is curved in the  
36          direction of its travel through the needlefelting

1 machine.

2

3 6. A needlefelt as claimed in claim 5, characterised  
4 in that the needleboard is correspondingly curved.

5

6 7. A needlefelt as claimed in claim 4, characterised  
7 in that the needlefelting machine comprises two  
8 needleboards at respective locations which are  
9 mutually displaced along the direction of travel  
10 of the batt through the needlefelting machine.

11

12 8. A needlefelt as claimed in claim 7, characterised  
13 in that the two needleboards are respectively  
14 disposed to needle the batt from mutually opposite  
15 sides of the batt.

16

17 9. A needlefelt as claimed in claim 8 and wherein the  
18 needlefelt incorporates a scrim, characterised in  
19 that the first of said two needleboards in the  
20 direction of travel of the batt through the  
21 needlefelting machine is disposed to needle the  
22 layered combination of batt and scrim from the  
23 side opposite to the scrim.

24

25 10. A needlefelt as claimed in claim 3, characterised  
26 in that prior to being needled, the batt is  
27 subjected to a preliminary consolidation and fibre  
28 entanglement in a pre-needling machine.

29

30 11. A needlefelt as claimed in claim 10, characterised  
31 in that while being partially consolidated in the  
32 pre-needling machine, the batt is curved in its  
33 direction of travel through the pre-needling  
34 machine.

35

36 12. A needlefelt as claimed in claim 4, characterised

2025 RELEASE UNDER E.O. 14176

1 in the ball is a resilient hollow ball.

2

3 13. A needlefelt as claimed in claim 12, characterised  
4 in that said ball is a tennis ball.

5

6 14. A felt-covered ball, characterised in that the  
7 ball-covering felt is a needlefelt comprising an  
8 entanglement of fibres formed by the needlefelting  
9 of a fibre batt passed through a needlefelting  
10 machine having at least one needleboard providing  
11 barbed needles to penetrate said web in a range of  
12 angles including a plurality of angles which are  
13 non-perpendicular with respect to the surface of  
14 the batt.

15

16 15. A felt-covered ball as claimed in claim 14,  
17 characterised in that the ball comprises a  
18 resilient hollow core to which the needlefelt is  
19 adhered.

20

21 16. A felt-covered ball as claimed in claim 15,  
22 characterised in that the ball is a tennis ball.

23

24 17. A felt-covered ball, characterised in that the  
25 ball is covered by a needlefelt produced by the  
26 method as claimed in claim 1.

27

28 18. A felt-covered ball, characterised in that the  
29 ball is covered by a needlefelt as claimed in  
30 claim 4.

31

32 19. A felt-covered ball as claimed in claim 17 or in  
33 claim 18, characterised in that the ball is a  
34 tennis ball.

35

36 20. A needlefelt as claimed in claim 4, characterised

1 in that prior to being needled, the batt is  
2 subjected to a preliminary consolidation and fibre  
3 entanglement in a pre-needling machine.  
4

5 21. A needlefelt as claimed in claim 20, characterised  
6 in that while being partially consolidated in the  
7 pre-needling machine, the batt is curved in its  
8 direction of travel through the pre-needling  
9 machine.  
10  
11

1     **ABSTRACT :**  
2  
3     A ball-covering needlefelt produced by needling a fibre  
4     batt in a range of angles including a plurality of  
5     angles which are non-perpendicular to the plane of the  
6     batt. The range of angles is preferably achieved by  
7     the batt being curved during needling, the batt  
8     conveniently being curved in its direction of travel  
9     through the needling machine. The needleboard of the  
10    needling machine is preferably correspondingly curved.

21  
22 The invention is particularly applicable to the  
23 manufacture of championship-quality tennis balls.

24

25

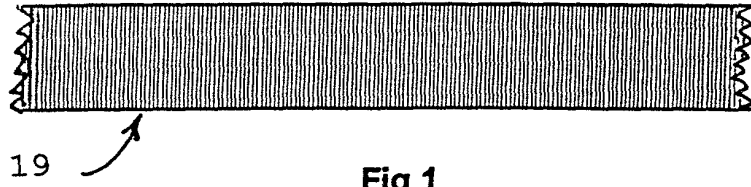


Fig 1

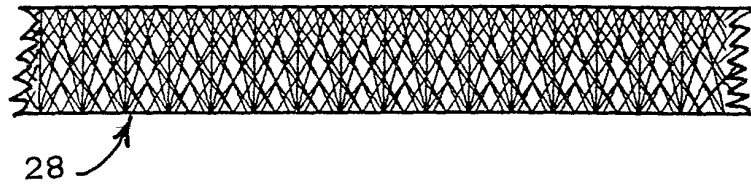


Fig 2

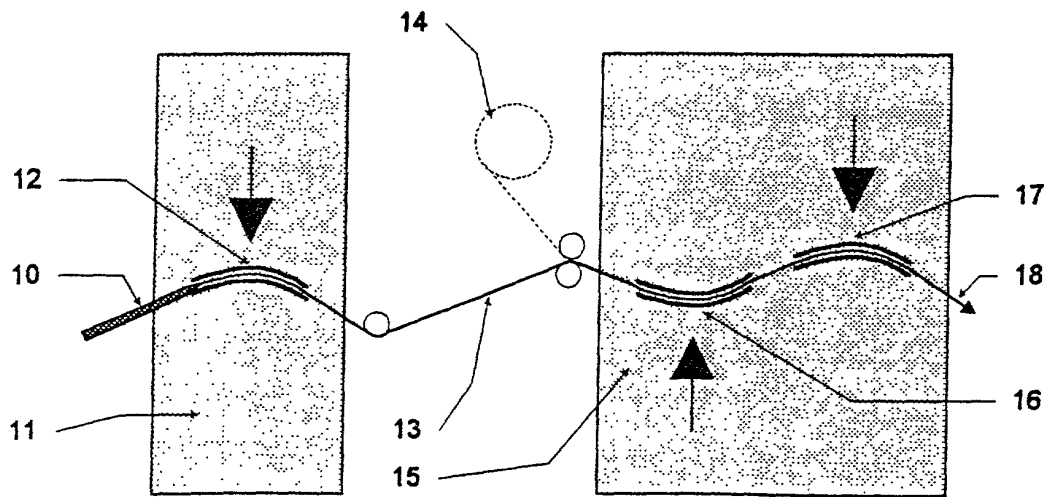


Fig 3





18



Fig. 5

United States Patent Application

COMBINED DECLARATION AND POWER OF ATTORNEY

Attorney's Docket Number MUR-V08467

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

"Non-Woven Fabric"

the specification of which:

[a] is attached hereto

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below, and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter and having a filing date before that of the application(s) of which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE OF FILING	PRIORITY CLAIMED
United Kingdom	9820165.0	17 September 1998	Yes

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the patent and Trademark Office connected therewith:

**Ratner & Prestia**

Paul F Prestia	Reg No 23,031	Christopher R Lewis	Reg No 36,201
Allan Ratner	Reg No 19,717	Louis W Beardell Jr	Reg No 40,506
Andrew L Ney	Reg No 20,300	Rocco L Adomato	Reg No 40,480
Kenneth N Nigon	Reg No 31,549	Jacques L Etkowicz	Reg No 41,738
Kevin R Casey	Reg No 32,117	Eric A Dichter	Reg No 41,708
Benjamin E Leace	Reg No 33,412	Mark J Marcelli	Reg No 38,593
James C Simmons	Reg No 24,842	Joshua L Cohen	Reg No 38,040
Lawrence E Ashery	Reg No 34,515	Christopher J Dervishian	Reg No 42,480
Robert L Anderson	Reg No 25,771	Jack J Jankovitz	Reg No 42,690

Send correspondence to: RATNER & PRESTIA  
Suite 301, One Westlakes,  
Berwyn, P O Box 980,  
Valley Forge, PA 19482-0980

Telephone calls: Allan Ratner (610) 407 0700

**FIRST INVENTOR**

Full name: BRASIER, Alan John  
Residence: Gloucestershire, England  
Citizenship: Great Britain  
Post office address: 53 Swallowcroft  
Easington  
Stonehouse  
GLOUCESTERSHIRE  
GL10 3BH  
United Kingdom

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such wilful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of First Inventor



Date

8<sup>th</sup> September 1999

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the Application or any patent issued thereon.